




FEATURES

- Fast Response time (µs)
- Environmental Protection, IP67 Rated
- Water Resistant and Outdoor Rated
- 17-4 PH stainless-steel construction
- Utilizes metal foil strain gauge technology
- Quick Disconnect Cable



Top view

Bottom view



+ Output	(compression)
----------	---------------

SPECIFICATIONS		
PERFORMANCE		
Nonlinearity	±0.25% of RO (5000 lb) ±0.5% of RO (10000 lb)	
Hysteresis	±0.25% of RO (5000 lb) ±0.5% of RO (10000 lb)	
Nonrepeatability	±0.1% of RO	
ELECTRICAL		
Rated Output (RO)	2 mV/V nom	
Excitation (VDC or VAC)	18 max	
Bridge Resistance	700 Ohm nom	
Insulation Resistance	≥500 MOhm @ 50 VDC	
Connection	4 Position Micro Receptacle	
Wiring/Connector Code	CC19	
MECHANICAL		
Weight (approximate)	4 oz [113.4 g]	
Safe Overload	150% of RO	
Deflection	See chart on next page	
Material	17-4 PH stainless-steel	
IP Rating	IP67	
TEMPERATURE		
Operating Temperature	–60 to 200°F [–50 to 93°C]	
Compensated Temperature	60 to 160°F [15 to 72°C]	
Temperature Shift Zero	±0.01% of RO/°F [0.018% of RO/°C]	
Temperature Shift Span	±0.005% of LOAD/°F [0.009% of LOAD/°C]	
CALIBRATION		
Calibration Test Excitation	10 VDC	
Calibration (standard)	5-pt Compression	
Shunt Calibration Value	100 kOhm	
CONFORMITY		
RoHS	EU 2015/863	
CE	EN55011; EN61326-1	










りぐ

FUTEK Model LLB450

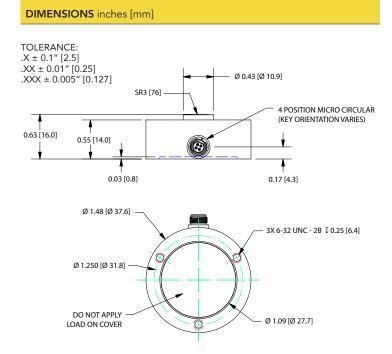

FUTE	K 4 PIN MICRO CIRCU	ILAR (CC19)	
1	+ EXCITATION	Red	
2	– EXCITATION	Black	21
3	– SIGNAL	White	43
4	+ SIGNAL	Green	

CAPACITIES FZ Deflection **Natural Frequency** ITEM # lb Ν (in) (kHz) 0.003 34 FSH04551 5000 22240 0.003 36 FSH04552 10000 44480

Drawing Number: FI1537

FUTEK reserves the right to modify its design and specifications without notice. Please visit <u>www.futek.com/salesterms</u> for complete terms and conditions.

10 Thomas, Irvine, CA 92618 USA Tel: (949) 465-0900

www.futek.com









とく

13485



2