



REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
B	10271	MATERIAL IS: 304L STAINLESS STEEL WAS: TITANIUM ALLOY	RLA 8/16/13	MH	AS

**MODEL 3145A**  
STUD MOUNT

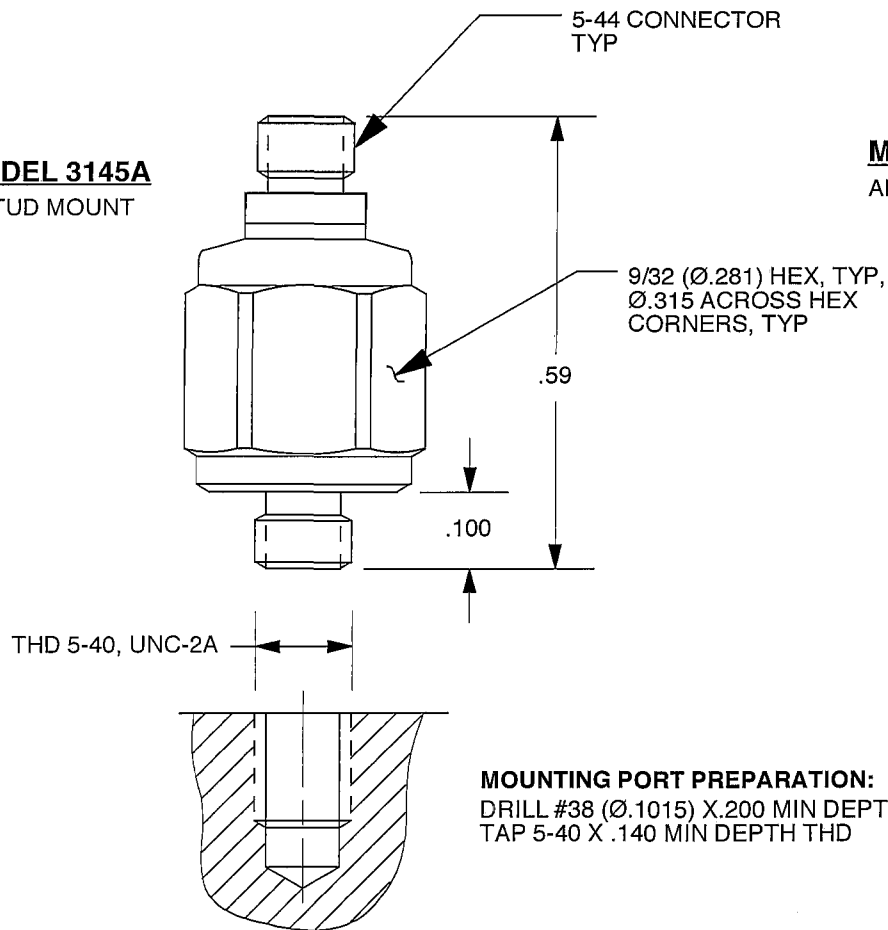

**MODEL 3145AG**  
ADHESIVE MOUNT

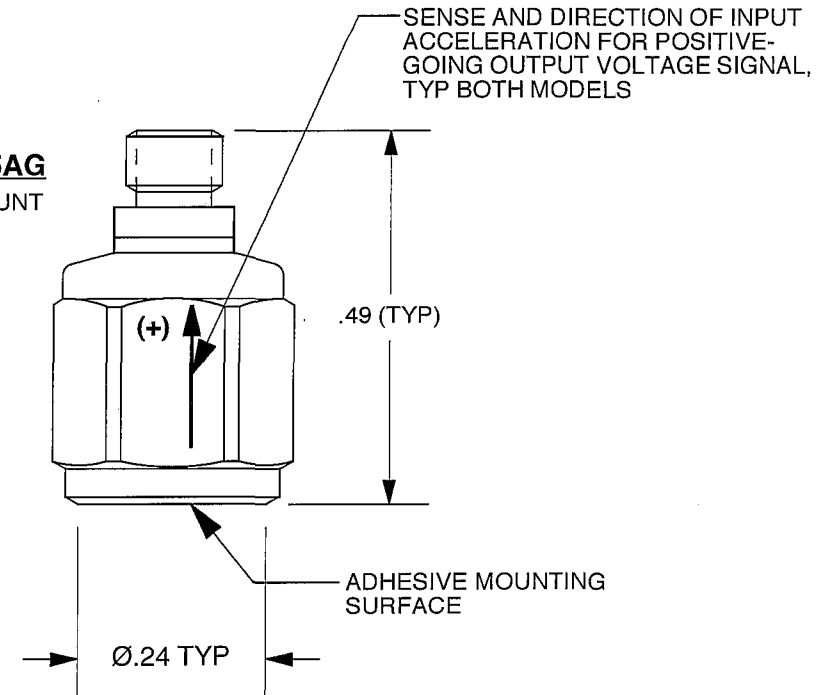

5. SUGGESTED ADHESIVE TYPE FOR MODEL 3145AG-CYANOACRYLATE "INSTANT BOND".
4. TO INSTALL MOD 3145A, TORQUE IN PLACE WITH 10 lb-INCHES.
3. WEIGHT-MOD 3145A-2.3 GRAMS  
MOD 3145AG-2.1 GRAMS
2. SEAL-HERMETIC, ALL WELDED.
1. MATERIAL: 304L STAINLESS STEEL


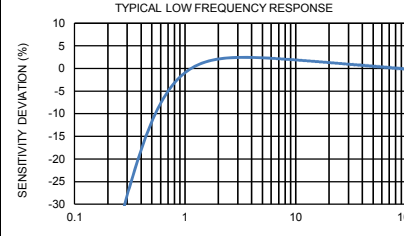
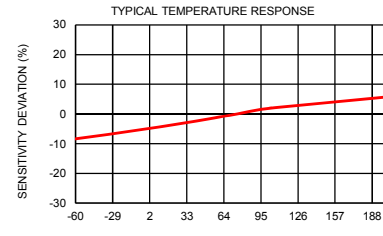
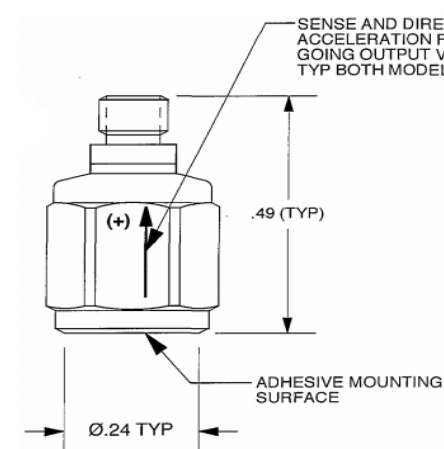
EXCEPT AS OTHERWISE NOTED	
ALL DIMENSIONS IN INCHES TOLERANCE: .XXX = ± .XX = ± .01	
SURFACE FINISH EXCEPT AS NOTED	✓
BREAK EDGES TO DEBURR RADIUS OR CHAMFER	
THESE DIAS TO T.I.R.	
FILLETS -	MAX RAD.




**MASTER**  
**ONLY IF IN RED**

CHATSWORTH, CA.

SCALE 4X	REV -	DATE -	ECN -		
DATE 3/28/00	PART NO.	SEE REV BLK			
DRAWN N.C.	CHECKED R.A.	MAT'L			
APPROVED N.C.	2/10/03	NEXT ASSEMBLY	USED ON		
TITLE OUTLINE/INSTALLATION DRAWING MODELS 3145A & 3145AG				DWG NO. 127-3145A	
				SHEET OF 1	

Model Number 3145AG		PERFORMANCE SPECIFICATIONS				DOC NO PS3145AG																					
		IEPE ACCELEROMETER				REV D, ECN 14478, 09/11/18																					
		<div>• MINIATURE DESIGN</div> <div>• HERMETICALLY SEALED</div>																									
PHYSICAL		ENGLISH		SI																							
Weight	0.08	oz	2.3	grams																							
Connector	5-44 Coaxial		5-44 Coaxial																								
Mounting Provision	Adhesive		Adhesive																								
Material, Housing/Connector	300 Series S.S.		300 Series S.S.																								
Sensing Element	Ceramic		Ceramic																								
Element Style	Crystal Shear Mode		Crystal Shear Mode																								
PERFORMANCE																											
Sensitivity, ±10% [1]	100	mV/g	10.19	mV/m/s <sup>2</sup>																							
Range for ± 5 Volts Output	50	g	491	m/s <sup>2</sup>																							
Frequency Response, ± 5%	1 to 7,000	Hz	1 to 7,000	Hz																							
Frequency Response, ± 10%	0.8 to 10,000	Hz	0.8 to 10,000	Hz																							
Resonant Frequency	> 45	kHz	> 45	kHz																							
Equivalent Electrical Noise Floor	0.0004	Grms	0.004	m/s <sup>2</sup> rms																							
Linearity, [2]	±1	% F.S.	±1	% F.S.																							
Maximum Transverse Sensitivity	5	%	5	%																							
Strain Sensitivity @ 250µε	0.002	g/µε	0.02	m/s <sup>2</sup> /µε																							
ENVIRONMENTAL																											
Maximum Vibration	600	Gpeak	5886	m/s <sup>2</sup> peak																							
Maximum Shock	3000	Gpeak	29430	m/s <sup>2</sup> peak																							
Temperature Range	-60 to +200	°F	-51 to +93	°C																							
Seal	Hermetic		Hermetic																								
Coefficient of Thermal Sensitivity	.04	%/°F	0.07	%/°C																							
ELECTRICAL																											
Supply Current Range [3]	2 to 20	mA	2 to 20	mA																							
Compliance Voltage Range	+18 to +30	Volts	+18 to +30	Volts																							
Output Impedence, Typ	100	Ω	100	Ω																							
Bias Voltage, +9 Volts Nom.	+11 to +13	VDC	+11 to +13	VDC																							
Discharge Time Constant	0.5 to 2.0	Sec	0.5 to 2.0	Sec																							
Output Signal Polarity for Acceleration Toward Top	Positive		Positive																								
Ground Isolation	Case Ground		Case Ground																								
		<div>This family also includes:</div> <table><tr><th>Model</th><th>Sensitivity (mV/g)</th><th>Frequency Response (Hz)</th><th>Time Constant (Sec)</th><th>Operating Temp (°F)</th></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr></table>						Model	Sensitivity (mV/g)	Frequency Response (Hz)	Time Constant (Sec)	Operating Temp (°F)															
Model	Sensitivity (mV/g)	Frequency Response (Hz)	Time Constant (Sec)	Operating Temp (°F)																							
		Refer to the performance specifications of the products in this family for detailed description																									
		<div>Supplied Accessories:</div> <div>1) Accredited calibration certificate (ISO 17025)</div>																									
		<div>Notes:</div> <div>[1] Measured at 100Hz, 1 Grms per ISA RP 37.2.</div> <div>[2] Measure using zero-based straight line method, % of F.S. or any lesser range.</div> <div>[3] Do not apply power to this system without current limiting, 20 mA MAX. To do so will destroy the IC charge amplifier.</div>																									
		<div><div><div>TYPICAL LOW FREQUENCY RESPONSE</div></div><div><div>TYPICAL TEMPERATURE RESPONSE</div></div></div>																									
		<div><div><div><div>SENSE AND DIRECTION OF INPUT ACCELERATION FOR POSITIVE-GOING OUTPUT VOLTAGE SIGNAL, TYP BOTH MODELS</div></div></div></div>																									
		Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-3145A for more information.																									



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax:818.700.7880 www.dytran.com

For permission to reprint this content, please contact info@dytran.com