


MOUNTING PREPARATION

PREPARE FLAT SURFACE (TO .001 TIR)
OVER 2.00 MIN DIAMETER AREA.
DRILL 39/64 (Ø.609) THRU, AT CENTER
TAP 11/16-12 UNS-2B X .430 MIN THREAD
DEPTH

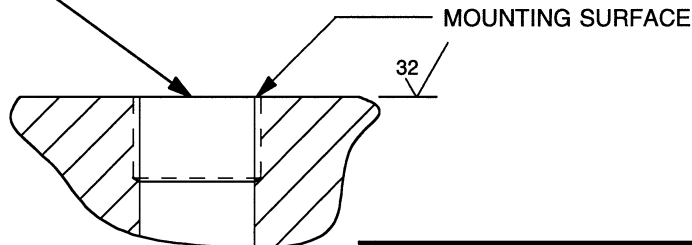

1. MATERIAL, HOUSING & CONNECTOR HOUSING:
300 SERIES STAINLESS STEEL. TOP AND
BOTTOM SURFACES, 17-4 PH ST. STEEL
2. WEIGHT - 460 GRAMS
3. TORQUE TO 20-25 LB-FT AT INSTALLATION
USING WRENCH ON WRENCH FLATS ONLY.
4. DO NOT APPLY IMPACT LOADS TO FORCE
SENSOR WITHOUT IMPACT CAP, MODEL 6217
OR EQUIVALENT. CONSULT FACTORY FOR
SPECIAL IMPACT CAPS FOR YOUR
PARTICULAR APPLICATION.

EXCEPT AS OTHERWISE NOTED	
ALL DIMENSIONS IN INCHES TOLERANCE: .XXX ± ± .XX ± ±	
SURFACE FINISH EXCEPT AS NOTED	✓
BREAK EDGES TO DEBURR RADIUS OR CHAMFER	
△ THESE DIAS ⊙ TO T.I.R.	
FILLETS -	MAX RAD.

DYTRAN INSTRUMENTS, INC.		CHATSWORTH, CA.	
SCALE 1X	REV	DATE	ECN
DATE 8/19/96	PART NO. 1060V1 - 1060V6		
DRAWN N.C.	CHECKED D.Z.	MAT'L	
APPROVED	NEXT ASSEMBLY		USED ON
TITLE OUTLINE/INSTALLATION DRAWING FORCE SENSOR, SERIES 1060V			DWG NO. 127-1060V
SHEET 1 OF 1			

Model Number 1060V5	PERFORMANCE SPECIFICATION	Doc No PS1060V5
	Force Sensors, IEPE	REV C, ECN 15099, 06/03/19



- **DYNAMIC FORCE SENSOR**
- **VOLTAGE MODE**
- **EXCELLENT LINEARITY**

This family also includes:

Model	Sensitivity (mV/Lb)	Range (LbsF) Compressive, Tensile	Max Force (LbsF) Compressive, Tensile	Discharge Time Constant (Sec)
1060V1	10	500, 500	10000, 1000	150
1060V2	5	1000, 1000	20000, 1000	300
1060V3	1	5000, 1000	30000, 1000	1500
1060V4	0.5	10000, 1000	40000, 1000	2000
1060V6	0.1	50000, 1000	60000, 1000	2000

PHYSICAL

Weight, Max.					
Connector	Type				
	Thread				
Housing	Material				
	Isolation				
Sensing Element	Material				
	Mode				

ENGLISH		SI	
16.10	oz	460	grams
Coaxial		Coaxial	
10-32		10-32	
Stainless steel		Stainless steel	
Case grounded		Case grounded	
Quartz		Quartz	
Compression		Compression	

PERFORMANCE

Sensitivity, +/-10%					
Compression Range					
Maximum Compression, +/-5%					
Tension Range					
Maximum Tension [1], +/-5%					
Resolution					
Linearity [2]					
Mounted Resonance (Unloaded)					
Stiffness					

0.2	mV/Lb	0.04	mV/N		
25000	Lbs.Force	111200	N		
50000	Lbs.Force	222400	N		
1000	Lbs.Force	4448	N		
1000	Lbs.Force	4448	N		
.35	Lb. RMS	1.55680	N RMS		
± 1	% Full Scale	± 1	% Full Scale		
≥ 75	kHz	≥ 75	kHz		
50	Lb/μin	8.66	kN/μm		

ENVIRONMENTAL

Coefficient Of Thermal Sensitivity					
Operating Temperature					
Maximum Vibration					
Maximum Shock					
Environmental Seal					

0.03	%/°F	0.05	%/°C		
-100 to +250	°F	-73 to +121	°C		
±3000	g's,Peak	±29400	m/s^2 Peak		
5,000	g's,Peak	49,000	m/s^2 Peak		
Epoxy		Epoxy			

ELECTRICAL

Supply Current [3]					
Compliance Voltage					
Discharge Time Constant, Min.					
F.S. Output Voltage					
Output Impedance					
Bias Voltage					

2 to 20	mA	2 to 20	mA		
+18 to +30	VDC	+18 to +30	VDC		
2000	Seconds	2000	Seconds		
5	Volts	5	Volts		
100	Ω	100	Ω		
+7.5 to +9.5	VDC	+7.5 to +9.5	VDC		


Refer to the performance specifications of the products in this family for detailed description

Supplied Accessories:

- 1) Accredited Calibration Certificate (ISO 17025)
- 2) MOD 6232 MOUNTING STUD

Notes:

- [1] Absolute maximum tension. Do not exceed in any case!
- [2] Percent of full scale or any lesser range, zero based best-fit straight line method.
- [3] Power these instruments only with constant current type power units. Do not connect to a source of voltage without current limiting. This will destroy the integral IC amplifier.
- [4] In the interest of constant product improvement, we reserve the rights to change the specifications without notice. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary overtime. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

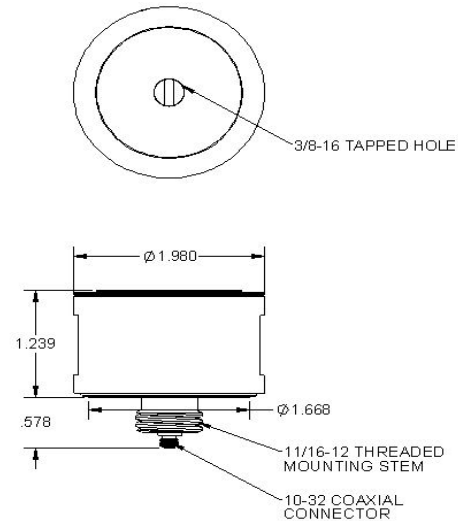

Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-1060V for more information.



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax:818.700.7880 www.dytran.com
For permission to reprint this content, please contact info@dytran.com