

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS


REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
E	12632	ADDED LENGTH TOLERANCE TABLE	JS 04/11/16	LA	LW

1 CABLE LENGTH TOLERANCE

ENGLISH		[METRIC]	
≤1FT	+1/ -0 IN	≤0.3m	+25mm -0mm
>1 FT - 5 FT	+2/ -0 IN	.0.3 m-1.5m	+50mm -0mm
> 5 FT - 10 FT	+4/ -0 IN	>1.5m-3m	+100mm -0mm
>10 FT - 25FT	+6 / -0 IN	>3m-7.5m	+150mm -0mm
>25 FT	+5% / -0%	>7.5m	+5%/-0%

3 SINGLE CONDUCTOR SHIELDED LOW NOISE CABLE

AWG	30-7/38 NICKEL PLATED COPPER
TEMP	200 DEG C WIRE RATED
VOLTAGE	600 VOLTS
CONDUCTOR INSULATION	EXTRUDED PTFE, CLEAR, .032 DIA NOM.
CAPACITANCE (SHIELD TO CONDUCTOR)	27 pF/FT
LOW NOISE WRAP #1 & #2	CARBON TAPE
IMPEDANCE	52 OHMS
INDUCTANCE	.80 microH/FT
SHIELD	38 AWG SILVER PLATED COPPER BRAID, 85% MIN COVERAGE, .050 DIA NOM
RESISTANCE	.20 OHM
JACKET	RED PTFE WRAP .005-.010 WALL
DIAMETER	.073 DIA NOM.
MINIUM BEND RADIUS	1 IN

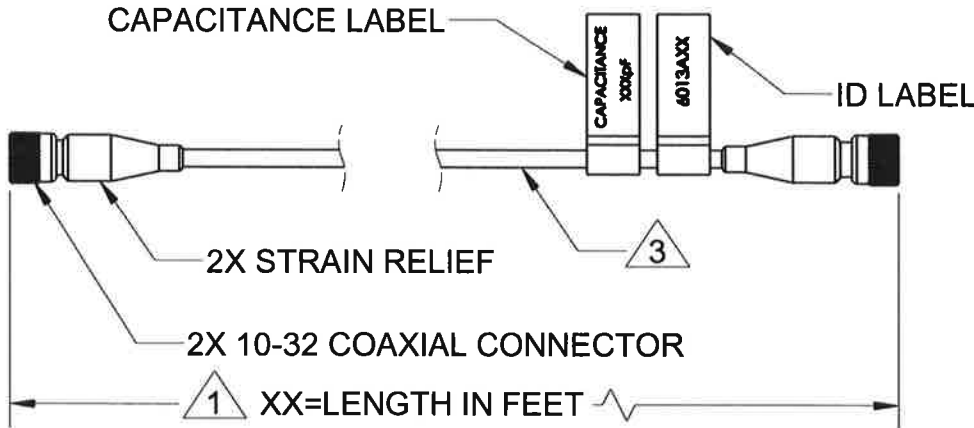

- 4** LOW OUT GASSING.
 - 3** SEE CABLE SPECIFICATION TABLE
 - 2. OPERATING RANGE: -67°F (-55°C) TO 230°F (110°C)
 - 1** XX=WILL VARY IN FEET PER CUSTOMER REQUIREMENTS, FOR EXAMPLE: 6013A10 IS A 10FT CABLE
- NOTES: UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. THDS PER MIL-S-7742. DIMENSIONS APPLY AFTER FINISHING.		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE: INCHES METRIC ANGLES .XX ± .03 X ± 0.8 ± 1° .XXX ± .010 .XX ± 0.25	
USED ON	NEXT ASSY	MATERIAL	FINISH
APPLICATION		DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION USA		63	
ALL MACHINED SURFACES TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.			

CONTRACT NO.	
APPROVALS	DATE
ORIG NC	10/05/82
CHK MPH	10/05/82
APP CES	06/23/06

DYTRAN INSTRUMENTS, INC. Chatsworth, CA **MASTER ONLY IN RED**

TITLE: **OUTLINE INSTALLATION DRAWING, LOW NOISE CABLE, 10-32 TO 10-32 MODEL 6013A**

SIZE A	CAGE CODE 2W033	DWG. NO. 127-6013A	REV E
SCALE: NONE	SOLIDWORKS	SHEET 1 OF 1	