


PROPRIETARY AND CONFIDENTIAL



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	7276	INITIAL RELEASE	JS 12/16/10	DV	AS
B	8472	16X 4-40 UNC-2B ∇ .224 WAS: 8X 4-40 UNC-2B THRU	JS 03/28/12	<i>dm</i>	<i>AS</i>

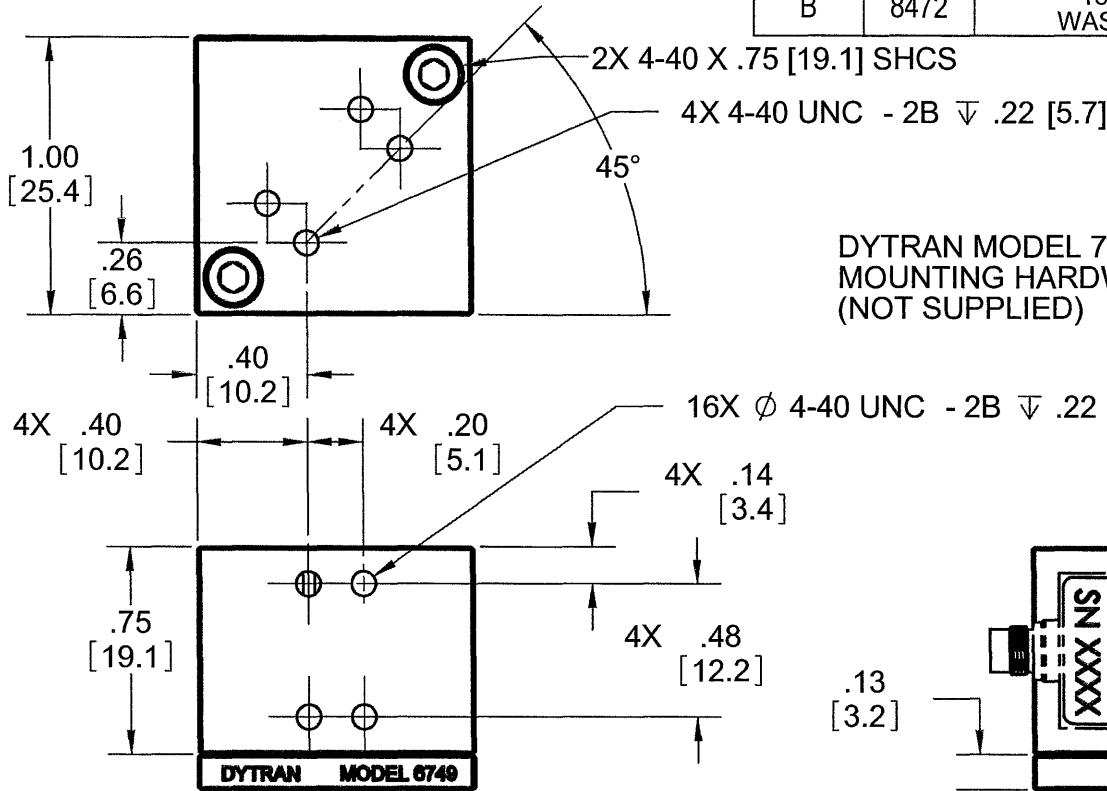

DYTRAN MODEL 7600BX & MOUNTING HARDWARE (NOT SUPPLIED)

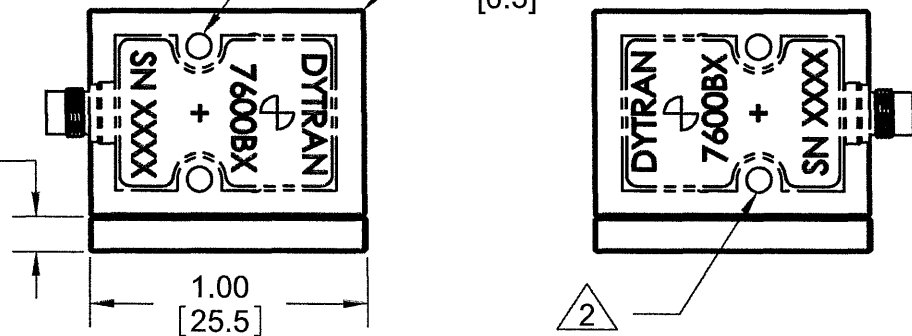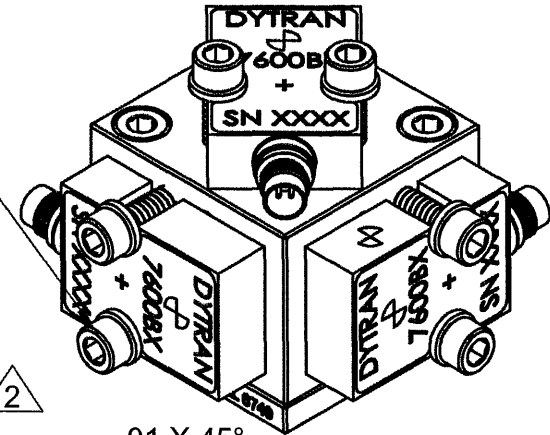

2 DUAL PATTERN MOUNTING HOLES PROVIDED FOR ACCELEROMETER POSITIONING.

1. MATERIAL: AL ALLOY 6061-T6 FINISH: BLACK ANODIZE PER MIL-A-8625

NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED:
 INTERPRET DIM & TOL PER ASME Y14.5M - 1994.
 REMOVE BURRS.
 COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA.
 CHAM EXT THDS 45° TO MINOR DIA.
 THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS.
 THDS PER MIL-S-7742.
 DIMENSIONS APPLY AFTER FINISHING.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS
 TOLERANCES ARE:
 INCHES METRIC ANGLES
 .XX ± .03 X ± 0.8 ± 1°
 .XXX ± 0.10 .XX ± 0.25

ALL MACHINED SURFACES. ⁶³
 TOTAL RUNOUT WITHIN .005.
 BREAK SHARP EDGES .005 TO .010.
 MACHINED FILLET RADII .005 TO .015.
 WELDING SYMBOLS PER AWS A2.4.
 ABBREVIATIONS PER MIL-STD-12.

CONTRACT NO.



TITLE: **OUTLINE/INSTALLATION DRAWING, 6749**

APPROVALS		DATE
ORIG	RT	10/15/10
CHK	DV	01/07/11
APP	AS	01/07/11
APP		

SIZE	CAGE CODE	DWG. NO.	REV
A	2W033	127-6749	B
SCALE: NONE	SOLIDWORKS	SHEET 1 OF 1	

DO NOT SCALE DRAWING