



REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
B	-	ADDED BLOCK	NC 2/8/05	NC 2/8/05	NC 2/8/05
C	5304	IS: MOLDED INSULATOR WAS: BLOCK	RLA 8/29/08	DV	AS
D	5768	IS: PIN-OUT LABEL WAS: PIN- OUT LABEL COLOR BLUE	JS 02/12/09	RA	ANS
E	6068	SEE ECN	RA 06/25/09		

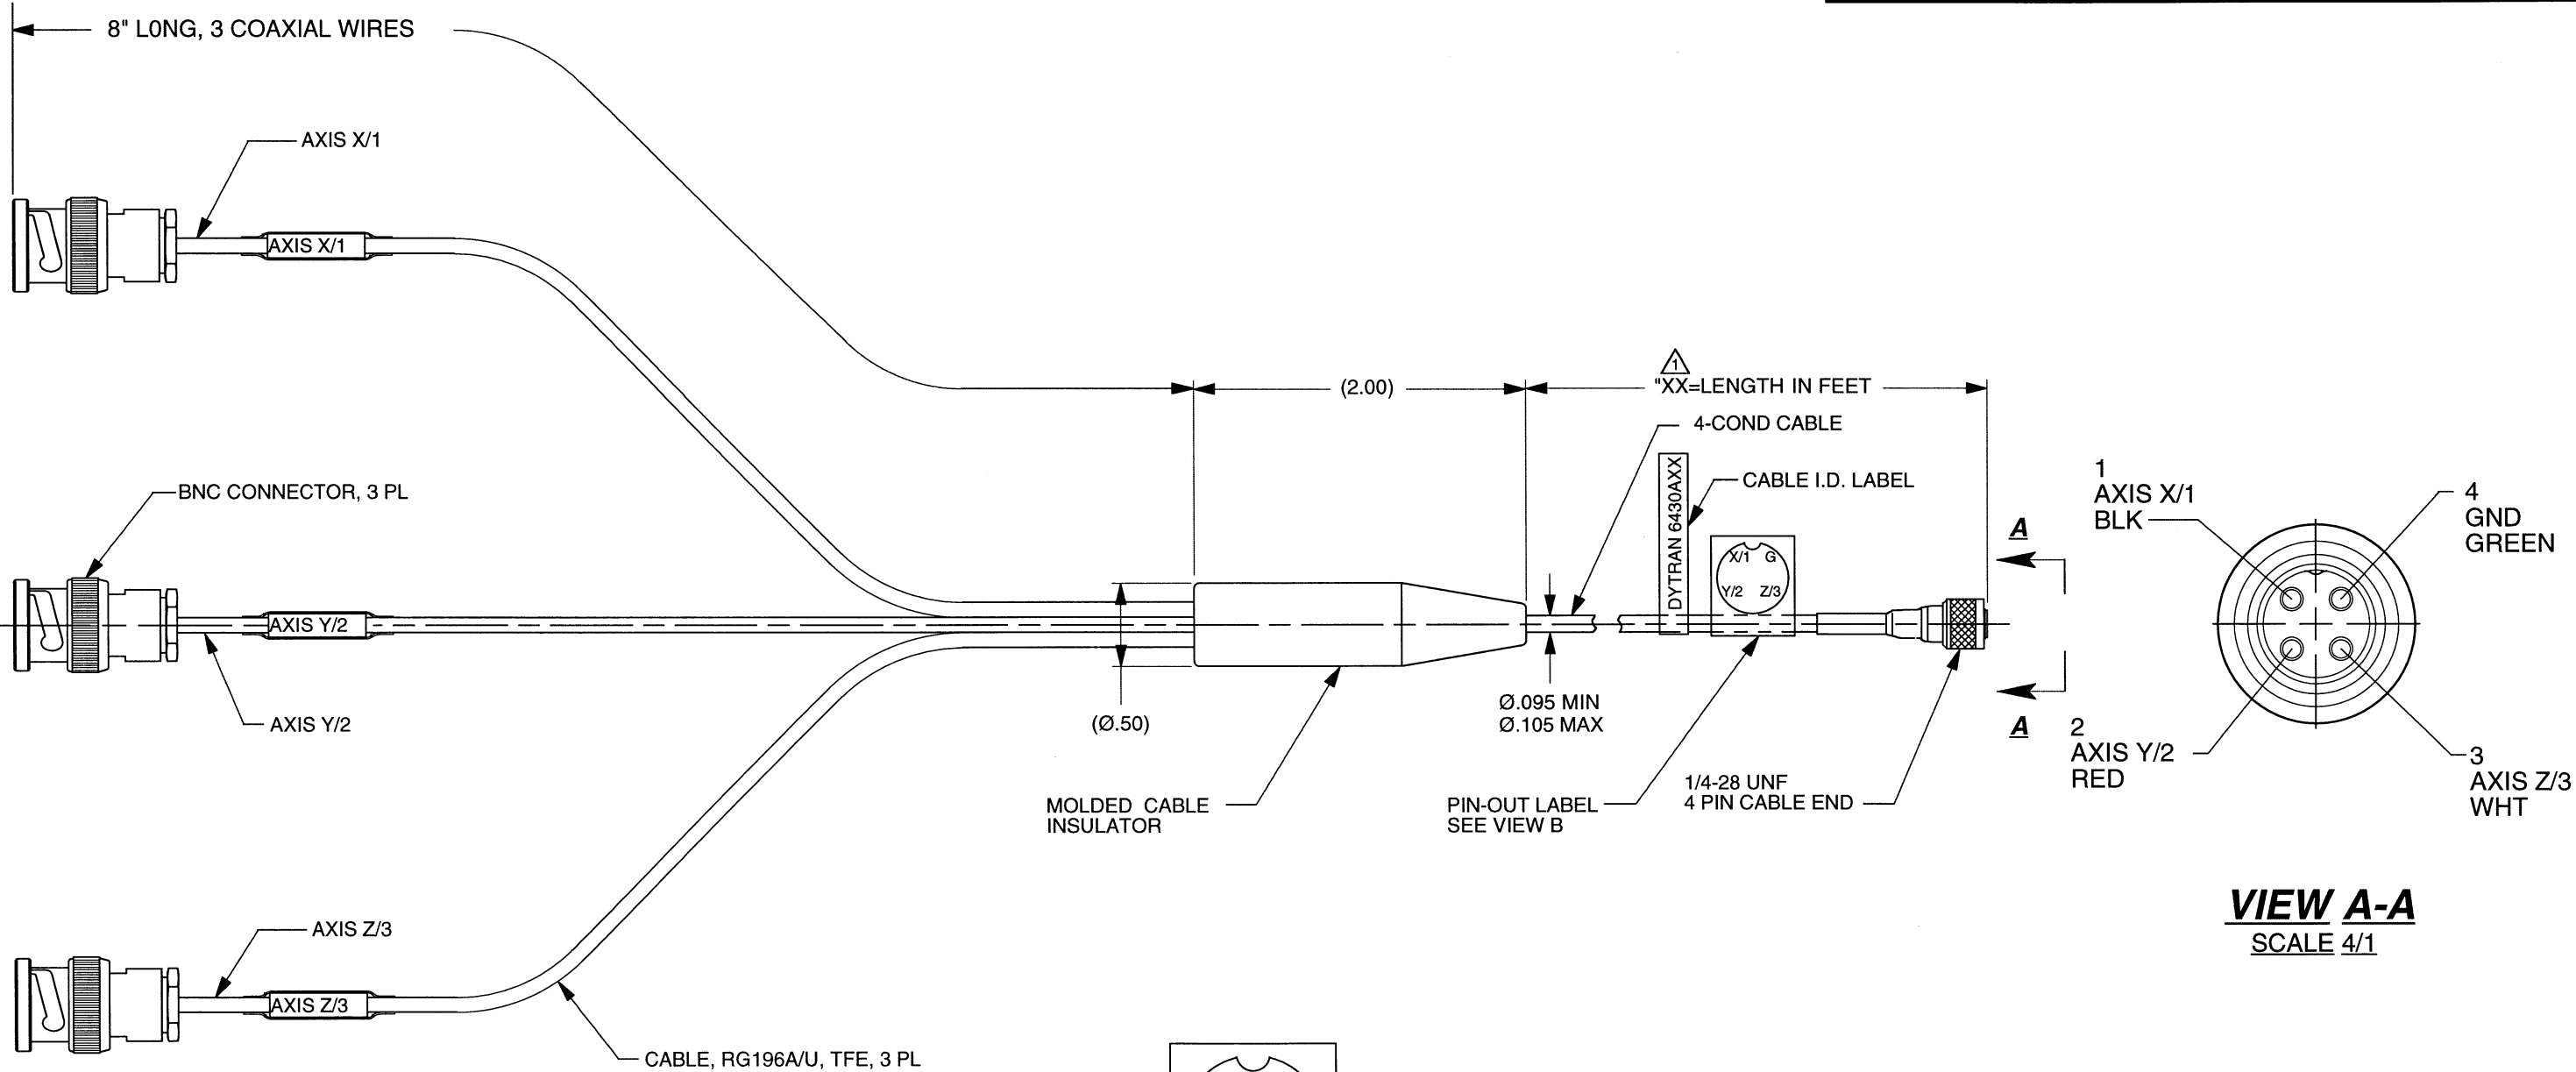


**VIEW A-A**  
SCALE 4/1



**VIEW B**  
SCALE 4/1

1 XX=WILL VARY IN FEET PER CUSTOMER REQUIREMENTS,  
FOR EXAMPLE: 6430A07 = 7 FT CABLE LENGTH

EXCEPT AS OTHERWISE NOTED			
ALL DIMENSIONS IN INCHES TOLERANCE: .XXX = ± .XX = ± .25			
SURFACE FINISH EXCEPT AS NOTED			
BREAK EDGES TO DEBURR RADIUS OR CHAMFER			
THESE DIAS TO T.I.R.			
FILLETS - MAX RAD.			

 <b>MASTER</b>		<b>ONLY IF IN RED</b>				CHATSWORTH, CA.				
SCALE	1X	REV	-	DATE	SEE REV BLK	ECN	-			
DATE	8/30/95		PART NO.		MODEL 6430AXX					
DRAWN	D.Z.	CHECKED	N.C.		MAT'L					
APPROVED	N.C.		2/8/05		NEXT ASSEMBLY			USED ON		
TITLE							DWG NO.			
OUTLINE/INSTALLATION DRAWING, CABLE ASSEMBLY, MINI 4 PIN. PLUG TO (3) BNC							127-6430A			
							SHEET 1 OF 1			