


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS


REV.	ECN	DESCRIPTION	BY/DATE	CHK	APPR
D	12550	TITLE WAS: ...BNC, 6997A	LA 03/04/16	9/	W

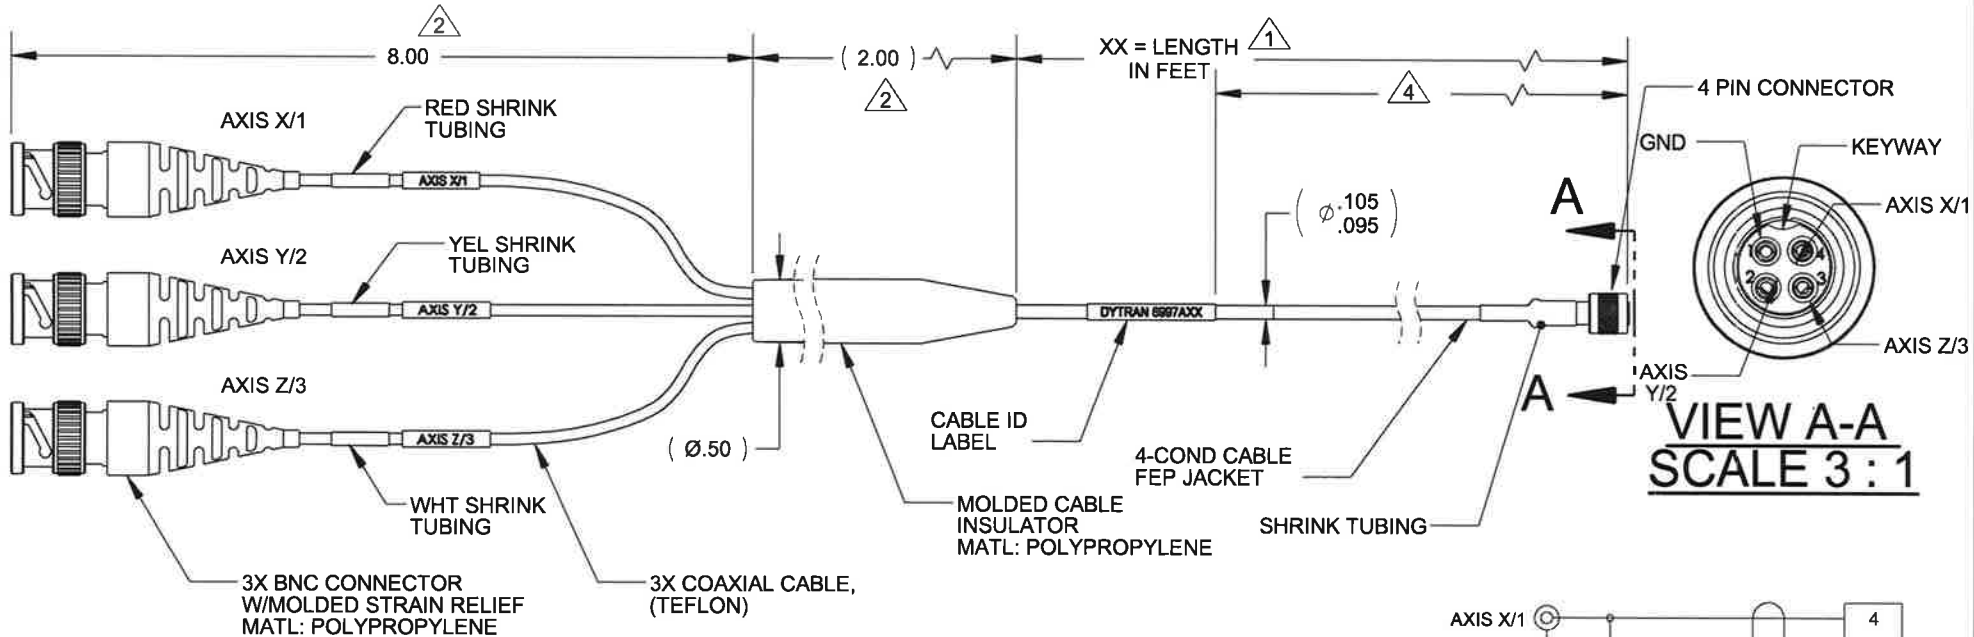

- 4 OPERATING TEMPERATURE: -67°F (-55°C) TO 392°F (200°C)
- 3. LOW OUT-GASSING.
- 2 TEMPERATURE RATING: -55°C TO 120°C.
- 1 PART NUMBER 6997AXX. "XX" DENOTES LENGTH IN FEET.

NOTES: UNLESS OTHERWISE SPECIFIED.

SCHEMATIC DIAGRAM

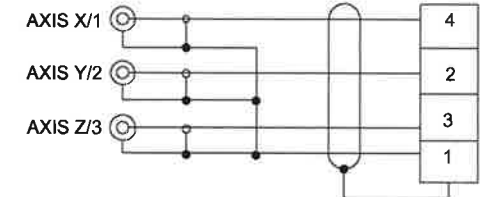

USED ON	NEXT ASSY	UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. THDS PER MIL-S-7742. DIMENSIONS APPLY AFTER FINISHING.
APPLICATION		
THIRD ANGLE PROJECTION USA		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE: INCHES METRIC ANGLES .XX ± .03 X ± 0.8 ± 1° .XXX ± .010 .XX ± 0.25
ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.		MATERIAL FINISH DO NOT SCALE DRAWING

CONTRACT NO.	
APPROVALS	
ORIG	DATE
CHK	10/25/11
APP	ANS
APP	DV
APP	11/23/11

MASTER ONLY IF IN RED

DYTRAN INSTRUMENTS, INC.
Chatsworth, CA

TITLE: **OUTLINE/INSTALLATION DRAWING, 4 PIN LONG NOSE TO (3) BNC, LOW OUTGASSING, 6997A**

SIZE	CAGE CODE	DWG. NO.	REV
A	2W033	127-6997A	D
SCALE: NONE		SOLIDWORKS	SHEET 1 OF 1