


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS, INC. IS PROHIBITED

REVISIONS

REV.	ECN	DESCRIPTION	BY/DATE	CHK	APPR
C	6309	REDRAWN WITH CHANGES	RA 10/07/09	EP	DV
D	8604	4 PIN CONNECTOR IS: 120-0292-01 WAS: 120-0010-01	RA, 05/17/12	<i>RA</i>	<i>DV</i>

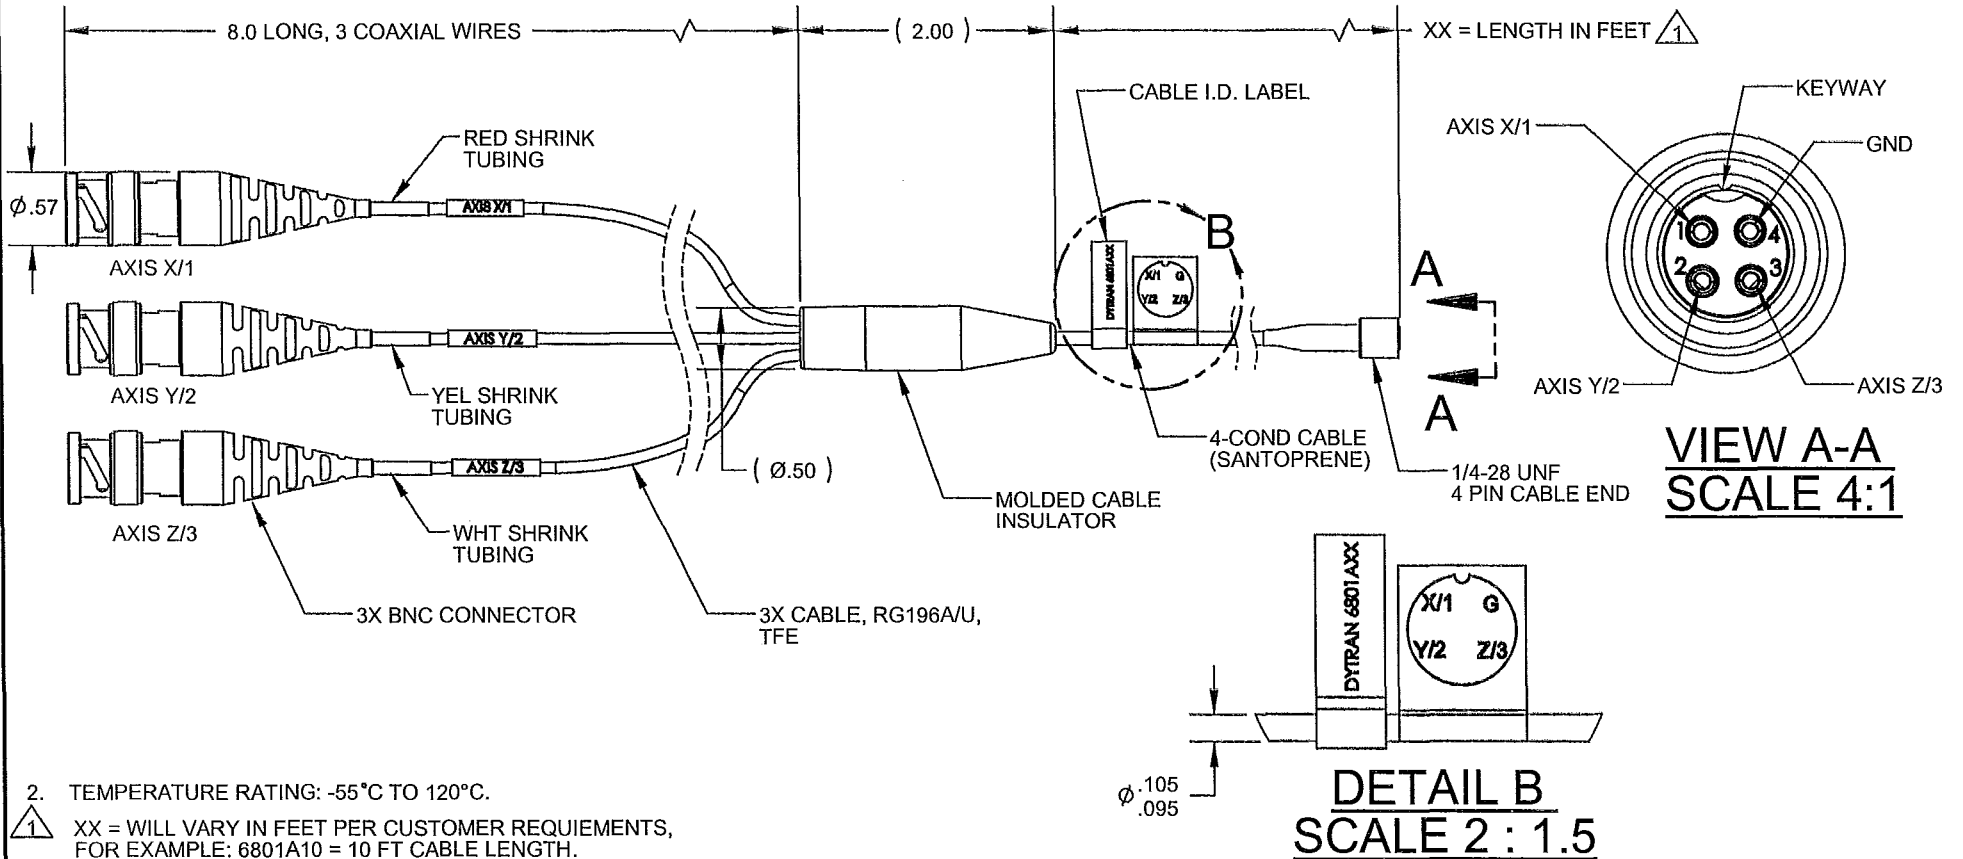

- 2. TEMPERATURE RATING: -55°C TO 120°C.
- ¹ XX = WILL VARY IN FEET PER CUSTOMER REQUIEMENTS, FOR EXAMPLE: 6801A10 = 10 FT CABLE LENGTH.

NOTES: UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. THDS PER MIL-S-7742. DIMENSIONS APPLY AFTER FINISHING. ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.	
6801AXX	NEXT ASSY
APPLICATION	
THIRD ANGLE PROJECTION USA	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE: INCHES .XX ± .25 ANGLES ± 1°	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

CONTRACT NO.	
APPROVALS	
ORIG	D.Z. 08/30/95
CHK	DV 09/30/08
APP	DV 09/30/09
APP	

DYTRAN INSTRUMENTS, INC. **MASTER**
ONLY IF IN RED

TITLE:
**OUTLINE/INSTALLATION DRAWING,
MINI 4 PIN TO (3) BNC, MODEL 6801A**

SIZE A	CAGE CODE 2W033	DWG. NO. 127-6801A	REV D
SCALE: NONE		SOLIDWORKS	SHEET 1 OF 1