




REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	9366	INITIAL RELEASE	LN 11/16/12	9J	AS

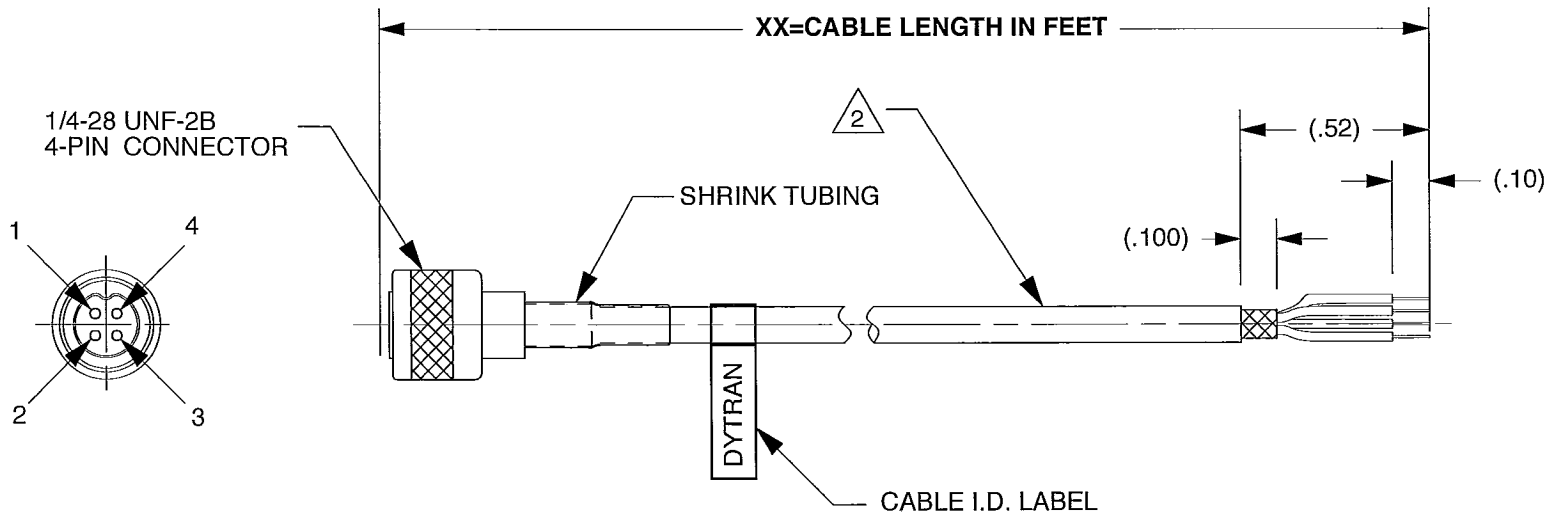

△ CABLE SPECIFICATIONS	
TEMPERATURE	200°C MAX.
VOLTAGE	250 VOLTS MAX.
SHIELD	SILVER PLATED COPPER, 90% MIN COVERAGE
CONDUCTOR	30 AWG 7/38 SILVER PLATED COPPER
JACKET	FEP, .006/.015 WALL, .095/.105 O.D., BLACK

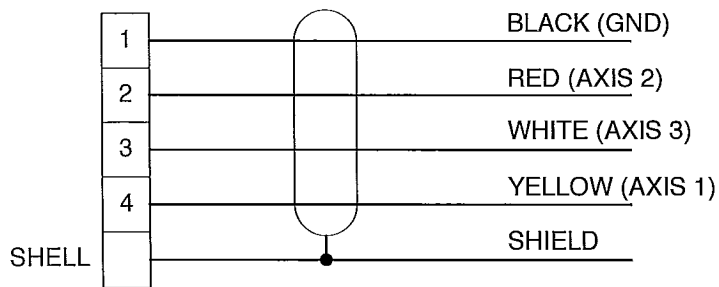

SCHEMATIC DIAGRAM

△ CABLE, 4-CONDUCTORS, SHIELDED. SEE TABLE FOR SPECIFICATIONS

△ PART NUMBER: 6483AXX. 'XX' DENOTES LENGTH IN FEET.

		MASTER ONLY IF IN RED CHATSWORTH, CA.					
SCALE	2X	REV	-	DATE	SEE REV BLK	ECN	-
DATE	11/16/12	PART NO.	MODEL 6483XX △				
DRAWN	L.N.	CHECKED	9J				
APPROVED	AS.		NEXT ASSEMBLY	USED ON			
TITLE						DWG NO.	
OUTLINE/INSTALLATION DWG, CABLE ASSEMBLY, MODEL 6483A, 4-PIN TO CUTOFF						127-6483A	
SHEET						1 OF 1	