




CABLE LENGTH TOLERANCE

≤ 1 FT	+1/ -0 IN
> 1 FT - 5 FT	+2/ -0 IN
> 5 FT - 10 FT	+4/ -0 IN
> 10 FT - 25 FT	+6/ -0 IN
> 25 FT	+5%/ -0%

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	8819	ADDED ID LABEL	AB 06/29/12	JS	DV
B	11639	SEE ECN	LA 01/06/15	9L	LW

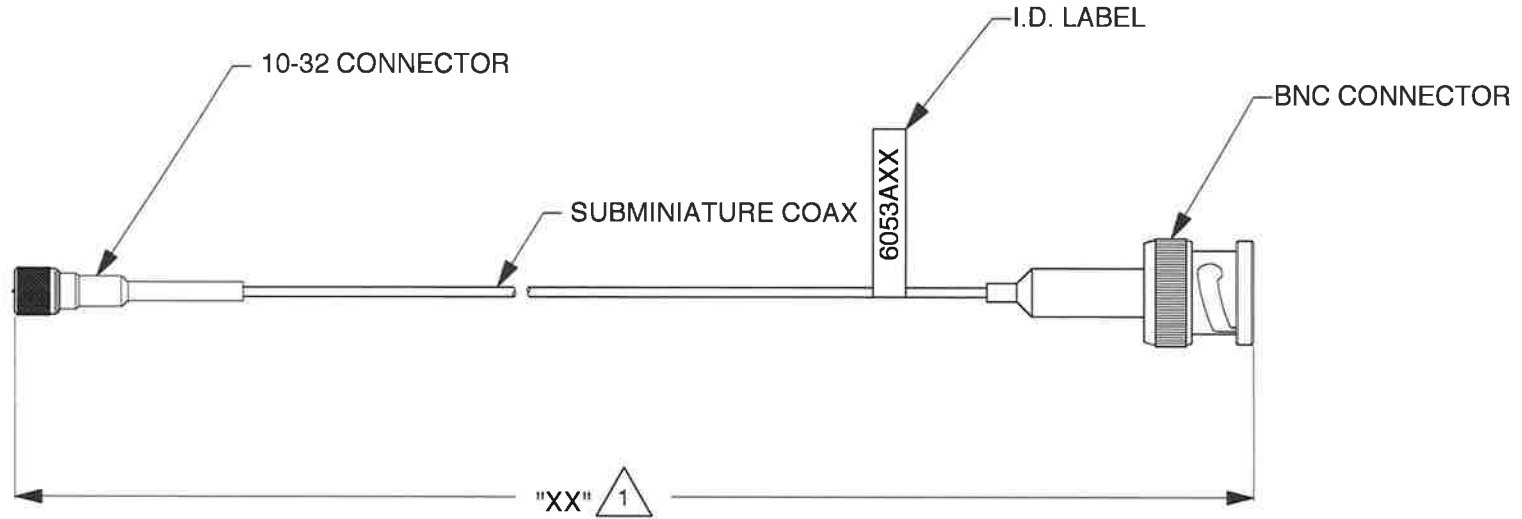

CABLE, COAX	
TEMPERATURE	220°F MAX
CONDUCTOR	30 AWG 40/46 BARE COPPER
INSULATION	.022 DIA WHITE PVC, .005 THK WALL
SHIELD	44 TINNED COPPER BRAIDED, 90% MIN. COVERAGE
JACKET	.051 DIA GRAY PVC, .010 THK WALL

2. TEMPERATURE RATING: -67°C TO 104°C (-88°F TO 220°F)



PART NO. 6053AXX (XX DENOTES LENGTH IN FEET).

IDYTRAN INSTRUMENTS, INC.		MASTER ONLY IF IN RED		CHATSWORTH, CA.	
SCALE 1X	REV -	DATE -	ECN SEE REV BLOCK		
DATE 7/19/02	PART NO. SEE TABLE				
DRAWN R.A.	CHECKED N.C	MAT'L			
APPROVED DV 07/16/12	NEXT ASSEMBLY		USED ON		
TITLE OUTLINE DRAWING, FLEXIBLE 10-32 PLUG TO BNC PLUG, MODEL 6053A			DWG NO. 127-6053A		
SHEET 1 OF 1					