

PROPRIETARY AND CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS

REV.	ECN	DESCRIPTION	BY/DATE	CHK	APPR
D	11497	REVISED AND REDRAWN ON SOLIDWORKS	RA, 11/18/14	MH	W

1 CABLE LENGTH TOLERANCE

≤1FT	+1/ -0 IN
>1 FT - 5 FT	+2/ -0 IN
> 5 FT - 10 FT	+4/ -0 IN
>10 FT - 25FT	+6 / -0 IN
>25 FT	+5% / -0%

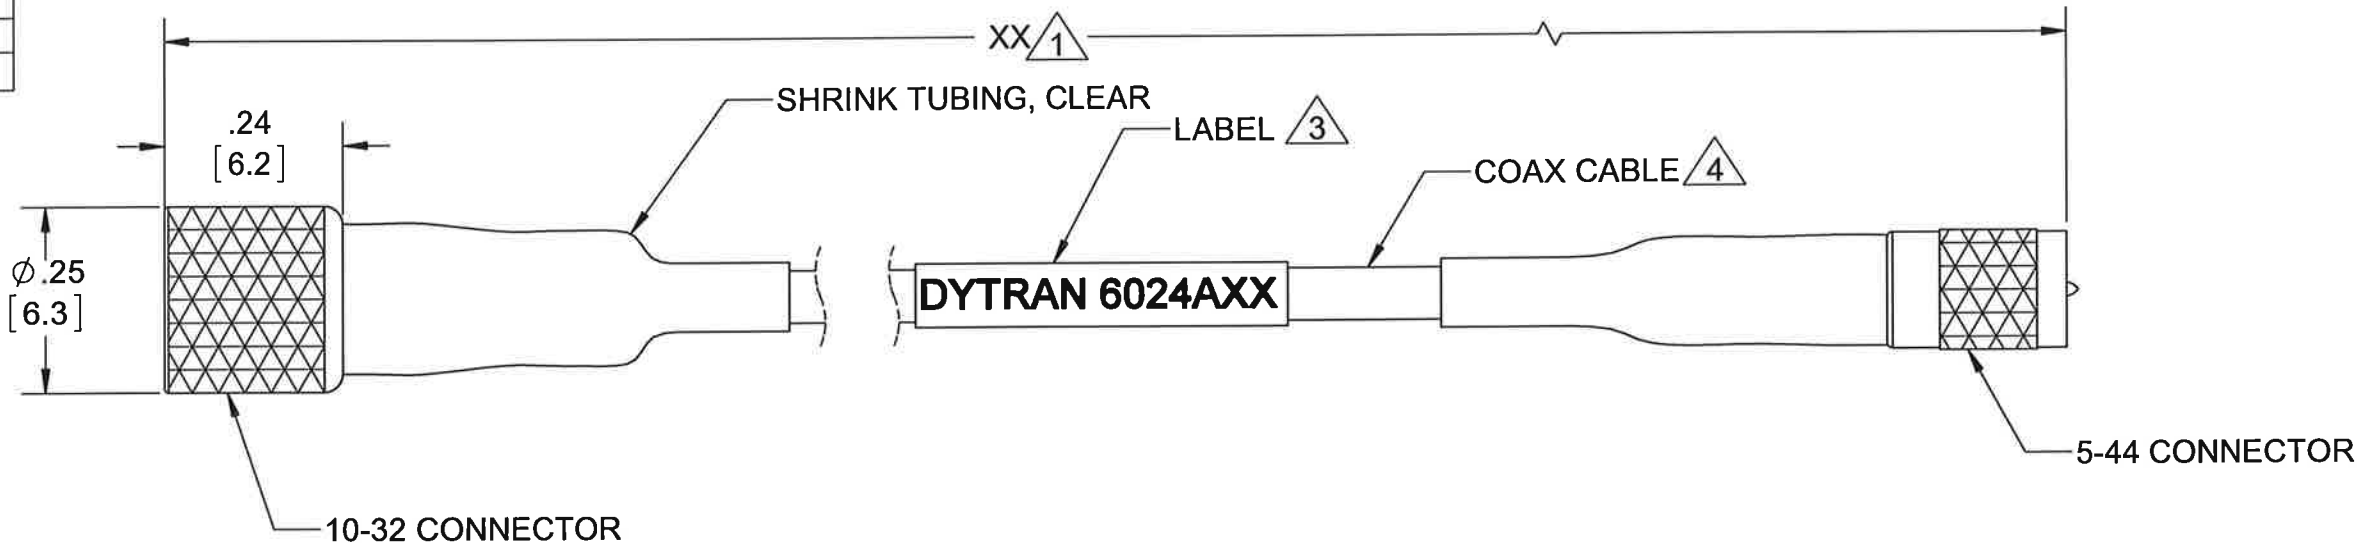

4 SINGLE CONDUCTOR SHIELDED LOW NOISE CABLE

AWG	30
STRAND CONSTRUCTION	40/46
TEMPERATURE	200 DEG C WIRE RATED
NOM DIAMETER	Ø.012
JACKET	WHT PTFE WRAP .005-.010 WALL
SHIELD	44 AWG, SILICONE RUBBER
NOMINAL O.D.	Ø.074
WITHSTANDING VOLTAGE	2000 VAC
CONDUCTOR INSULATION	EXTRUDED PTFE, NATURAL, Ø.033 ±.002
CAPACITANCE (SHIELD TO CONDUCTOR)	29 pF/FT
LOW NOISE WRAP #1 & #2	CARBON TAPE
IMPEDANCE	50+/-5 OHMS
INDUCTANCE	.07mH/ft NOM
RESISTANCE	.1138 MAX OHMS PER FOOT
MINIMUM BEND RADIUS	1 IN
VOC	69% NOM

4 SEE TABLE FOR CABLE SPECIFICATIONS

3 LABEL COVERED WITH CLEAR HEAT SHRINK

2. TEMPERATURE RANGE: -67°F(-55°C) TO 311°F (155°C) MAX

1 PART NUMBER 6024AXX (XX DENOTES LENGTH IN FEET)

NOTES: UNLESS OTHERWISE SPECIFIED


UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. DIMENSIONS APPLY AFTER FINISHING.

ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.

DECIMALS	METRIC	ANGLES
.XX ±.03	.X ± 0.8	±1°
.XXX ±.010	.XX ±0.25	

APPROVALS		DATE
ORIG	NC	07/18/02
CHK	MH	07/19/02
APP	CES	07/19/02

DO NOT SCALE DRAWING



TITLE: OUTLINE/INSTALLATION DRAWING, CABLE, 10-32 TO 5-44, MODEL 6024A

SIZE	CAGE CODE	DWG NO	REV
B	2W033	127-6024A	D
SCALE: 1:1		SHEET 1 OF 1	