


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	13959	INITIAL RELEASE	NDC 01/16/17	LN	AS
B	15602	REVISED RECOMMENDED ACCESSORIES	KG 02/28/20	JD	LD

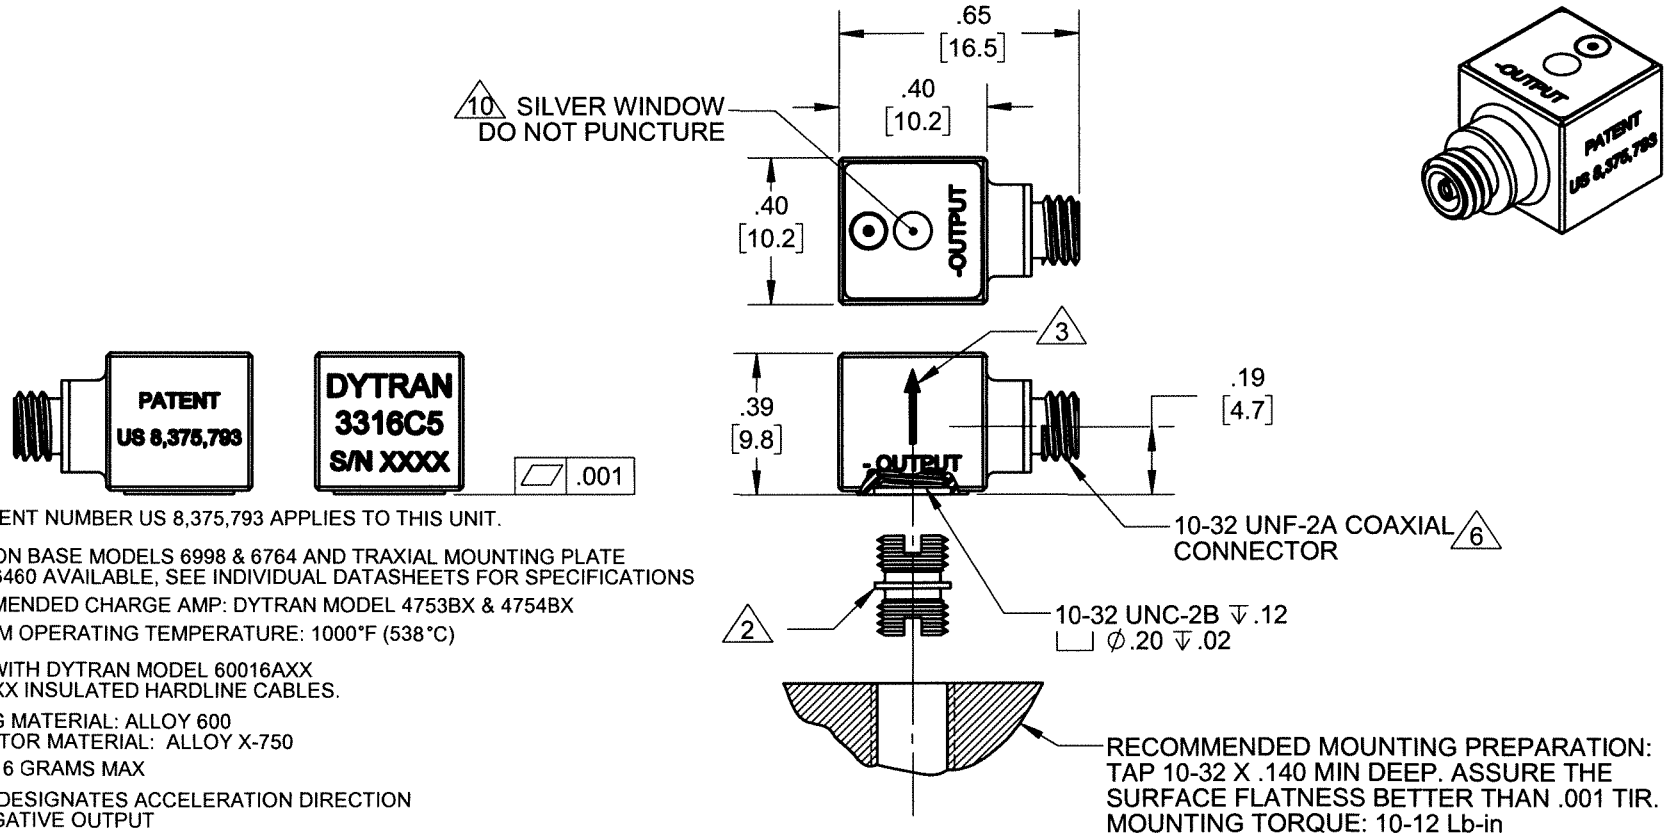

- 10. U.S. PATENT NUMBER US 8,375,793 APPLIES TO THIS UNIT.
 - 9. ISOLATION BASE MODELS 6998 & 6764 AND TRAXIAL MOUNTING PLATE MODEL 6460 AVAILABLE, SEE INDIVIDUAL DATASHEETS FOR SPECIFICATIONS
 - 8. RECOMMENDED CHARGE AMP: DYTRAN MODEL 4753BX & 4754BX
 - 7. MAXIMUM OPERATING TEMPERATURE: 1000°F (538°C)
 - 6. MATES WITH DYTRAN MODEL 60016AXX & 6979AXX INSULATED HARDLINE CABLES.
 - 5. HOUSING MATERIAL: ALLOY 600
CONNECTOR MATERIAL: ALLOY X-750
 - 4. WEIGHT: 6 GRAMS MAX
 - 3. ARROW DESIGNATES ACCELERATION DIRECTION FOR NEGATIVE OUTPUT
 - 2. MOUNTING STUD 6200S (10-32 TO 10-32) SUPPLIED
 - 1. SENSITIVITY: 1 TO 2 pC/g
- NOTES: UNLESS OTHERWISE SPECIFIED

USED ON	NEXT ASSY
APPLICATION	
THIRD ANGLE PROJECTION USA	
UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. THDS PER MIL-S-7742. DIMENSIONS APPLY AFTER FINISHING.	
ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE: INCHES METRIC ANGLES .XX ± .03 .X ± 0.8 ± 1° .XXX ± .010 .XX ± 0.25	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

CONTRACT NO.	
APPROVALS	
ORIG	DATE
CHK	DATE
APP	DATE
APP	

DYTRAN INSTRUMENTS, INC. Chatsworth, CA

MASTER
ONLY IF IN RED

TITLE: **OUTLINE/INSTALLATION DRAWING, 3316C5, Z-AXIS**

SIZE	CAGE CODE	DWG. NO.	REV
A	2W033	127-3316C5	B
SCALE: NONE		SOLIDWORKS	SHEET 1 OF 1

Model Number 3316C5	PERFORMANCE SPECIFICATION		DOC NO PS3316C5
	SINGLE AXIS CHARGE MODE ACCELEROMETER		REV D, ECN 15735, 04/29/20



- Z-AXIS DIRECTIONAL OUTPUT
- MINIATURE SIZE
- HERMETICALLY SEALED
- HIGH TEMPERATURE OPERATION

PHYSICAL

Weight, Max	Type
Connector [3]	Tapped Hole
Mounting Provision	Housing
Material	Connector
Element Style	Material
	Type

ENGLISH		SI	
0.21	oz	6.0	grams
10-32 Coaxial		10-32 Coaxial	
10-32 UNF-2B		10-32 UNF-2B	
Alloy 600		Alloy 600	
Alloy X-750		Alloy X-750	
Single Crystal		Single Crystal	
Planar Shear		Planar Shear	

PERFORMANCE

Sensitivity [1]	1 to 2	pC/g	0.10 to 0.20	pC/m/s ²
Range F.S for ± 5 Volts Output	[9]	G's	[9]	m/s ²
Frequency Range, ±10%	[4] to 10000	Hz	[4] to 10000	Hz
Resonant Frequency	> 45	kHz	> 45	kHz
Capacitance	120	pF	120	pF
Linearity [2]	± 1%	% F.S.	± 1%	% F.S.
Phase Response (±5°)	[4] to 3000	Hz	[4] to 3000	Hz
Maximum Transverse Sensitivity	5	%	5	%
Base Strain Sensitivity	0.002	g/μe	0.02	m/s ² /μe
Insulation resistance, (Connector pin to case)	at 75°F > 5	MΩ	at 75°F > 5	Ω
	at 1000°F > 0.25	MΩ	at 1000°F > 0.25	Ω
Coefficient of Thermal Sens.	0.02	%F	0.02	%F
Ground Isolation	Case Grounded		Case Grounded	
Output Polarity	Negative		Negative	

ENVIRONMENTAL

Maximum Vibration	±6000	G, peak	±58860	m/s ² , peak
Maximum Shock	±10000	G, peak	±98100	m/s ² , peak
Temperature Range	-60 to+1000	°F	-51 to+538	°C
Seal	Hermetic		Hermetic	
Radiation Exposure Limit (Integrated Neutron Flux)	1.0E+10	N/cm ²	1.0E+10	N/cm ²
Radiation Exposure Limit (Integrated Gamma Flux)	1.0E+08	rad	1.0E+08	rad

This family also includes:

Model	Sensitivity (pC/g)	Range F.S (G's)	Output Polarity	Temperature (°F)
3316C3	1 to 2	-	Negative (X-Axis)	-60 to+1000
3316C4	1 to 2	-	Negative (Y-Axis)	-60 to+1000



Refer to the performance specifications of the products in this family for detailed description.

Supplied Accessories:

- 1) Accredited calibration certificate (ISO 17025)
- 2) Model 6200S mounting stud (10-32 to 10-32), qty 1

Notes:

- [1] Measured at 100Hz, 10 Grms per ISA RP 37.2
- [2] Measured using zero-based straight line method, % of F.S. or any lesser range.
- [3] Mates with Dytran cable 60016AXX and 6979AXX insulated hardline cables.
- [4] Low frequency response and phase response are a function of the discharge time constant of the charge amplifier used. See graph below for example.
- [5] In the interest of constant product improvement, we reserve the right to change specifications without notice. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.
- [6] Recommended charge amplifier: Dytran Models 4753B & 4754B, Series.
- [7] Isolation mounting base Model 6764 (triaxial) & Model 6998 (uniaxial) and mounting plate Model 6460 (triaxial) are available.
- [8] U.S. Patent number US 8,375,793 B2 applies to this unit.
- [9] This parameter depends on the gain settings of the charge amplifier used.

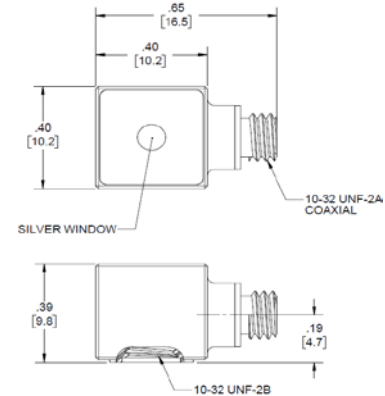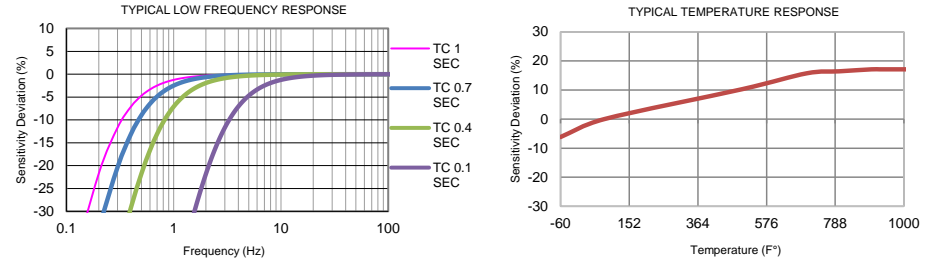

Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-3316C5 for more information.



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax:818.700.7880 www.dytran.com
For permission to reprint this content, please contact info@dytran.com